


SILVANTIS® R-SERIES: 270 W TO 290 W

60-Cell High Wattage Modules



SunEdison introduces the next generation of high performance solar modules based on innovative Continuous Cz (CCz) monocrystalline cells with PERC technology. The Silvantis R-Series delivers the highest levels of efficiency and durability, providing homeowners with the same quality and performance SunEdison's utility customers enjoy, while optimizing roof fit, overall system size and installer productivity.

SunEdison is a leader in utility-scale solar systems with over two and a half-million Silvantis modules deployed in some of the world's harshest climates and most remote locations. This experience, coupled with over 50 years of expertise in silicon technology and innovation enables SunEdison to design and produce highly advanced residential solar solutions.

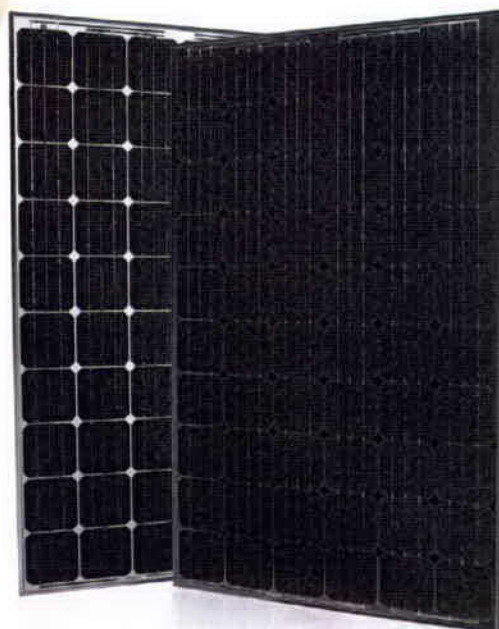

SILVANTIS ADVANTAGE

- 17.7% module efficiency with positive power tolerance
- PID-free: compatible with transformerless and multi-MPPT inverters
- Higher return on investment with more watts-per-module
- Reliability tested beyond international standards
- Utility-grade manufacturing: ISO 14001, ISO 9001 and 100% EL inspection

QUALITY & SAFETY

- Industry leading PID test conditions:
 - » 96 hours, 85 C, 85% relative humidity, -1kV
- IEC certified by TÜV SÜD:
 - » 61730 to ensure electrical safety
 - » 61215 long-term operation in a variety of climates including snow loading up to 5400 Pa and hail testing
 - » 61701 Level 1 salt mist corrosion resistant for marine regions
 - » 62716 ammonia testing for agricultural environments
- Manufactured to AQL 0.4 Level II quality and tested up to 3x beyond IEC standards
- CSA listed to UL 1703 for 1,000 V systems in the US and Canada
- MCS certified by BABT for the UK




Apparatus Class A
Safety Class II

ROBUST & AESTHETIC DESIGN

- Black anodized corrosion resistant aluminum frame
 - » White back sheet: SE-R2xCzC-3y
 - » Black back sheet: SE-R2xKzC-3y
- Low glare anti-reflective coated (ARC) tempered glass

SUNEDISON WARRANTY

- 25-year limited warranty for materials and workmanship for installations $\leq$ 250 kWDC
- 25-year linear power warranty at STC:
 - » Year 1: $\leq$ 3.5% of rated power
 - » After year 1: $\leq$ 0.7% rated power degradation per year

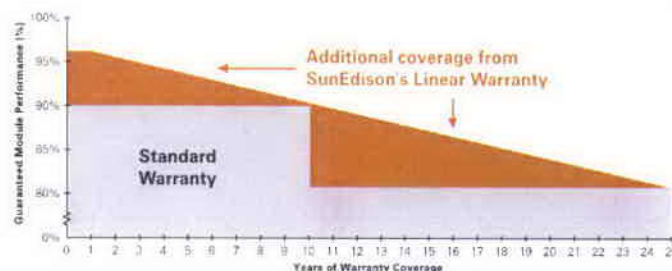

sunedison.com

SILVANTIS R-SERIES: 270 W TO 290 W

PHYSICAL PARAMETERS

Module Dimensions	1,658 mm x 990 mm x 50 mm
Module Weight	19 kg
Cell Type	PERC on CCz monocrystalline
Number of Cells	60
Frame Material	Black Anodized Aluminum
Tempered ARC Glass Thickness	3.2 mm

TEMPERATURE COEFFICIENTS AND PARAMETERS¹

Nominal Operating Cell Temperature (NOCT)	45 C $\pm$ 2 C
Temperature Coefficient of P _{max}	-0.44 %/C
Temperature Coefficient of V _{oc}	-0.32 %/C
Temperature Coefficient of I _{sc}	+0.05 %/C
Operating Temperature	-40 C to +85 C
Maximum System Voltage	1000 V (UL & IEC)
Limiting Reverse Current	9.20 A
Maximum Series Fuse Rating	15 A
P _{max} Production Tolerance	0 W to +5 W
Junction Box Rating	IP67
IEC 61730 Application	Class A
Module Fire Performance	Type 2
Fire Resistance Rating	Class C
Packaging Specifications	20 modules per pallet 520 modules per 40' high-cube container
Wind and Snow Front Load	Up to 5,400 Pa
Wind Back Load	2,400 Pa
Reduction of STC efficiency from 1000 W/m ² to 200 W/m ² (Relative)	< 4%

STC ELECTRICAL CHARACTERISTICS²

Model # (e.g. R2xxCzC-3y) ³	R270 CzC	R275 CzC	R280 CzC	R285 CzC	R290 CzC	R270 KzC	R275 KzC	R280 KzC	R285 KzC	R290 KzC
Rated Maximum Power P _{max} (W)	270	275	280	285	290	270	275	280	285	290
Open-Circuit Voltage V _{oc} (V)	38.5	39.0	39.2	39.3	39.3	38.5	38.6	38.6	38.7	38.7
Short-Circuit Current I _{sc} (A)	9.10	9.30	9.45	9.50	9.55	9.10	9.20	9.30	9.40	9.50
Module Efficiency (%)	16.4	16.8	17.1	17.4	17.7	16.4	16.8	17.1	17.4	17.7
Maximum Power Point Voltage V _{mpp} (V)	31.5	31.6	31.7	31.9	31.9	31.5	31.6	31.6	31.7	31.7
Maximum Power Point Current I _{mp} (A)	8.58	8.72	8.84	8.95	9.14	8.58	8.72	8.86	9.00	9.14

NOCT ELECTRICAL CHARACTERISTICS²

Model # (e.g. R2xxCzC-3y) ³	R270 CzC	R275 CzC	R280 CzC	R285 CzC	R290 CzC	R270 KzC	R275 KzC	R280 KzC	R285 KzC	R290 KzC
Rated Maximum Power P _{max} (W)	197.3	200.9	204.6	208.2	211.8	193.2	196.7	200.3	203.9	207.5
Open-Circuit Voltage V _{oc} (V)	35.5	35.6	35.7	35.8	35.9	35.3	35.5	35.6	35.7	35.8
Short-Circuit Current I _{sc} (A)	7.42	7.45	7.47	7.49	7.51	7.28	7.32	7.35	7.38	7.41
Maximum Power Point Voltage V _{mpp} (V)	28.4	28.8	29.1	29.4	29.6	28.2	28.6	28.9	29.2	29.5
Maximum Power Point Current I _{mp} (A)	6.94	6.97	7.03	7.09	7.15	6.84	6.88	6.93	6.99	7.05

Listed specifications are subject to change without prior notice.

¹Temperature coefficients may vary by $\pm 10\%$

²All electrical data at standard test conditions (STC): 1000 W/m², AM 1.5, 25 C; electrical characteristics may vary by $\pm 5\%$ and power measurement tolerance by $\pm 3\%$

³P_{max} Production Tolerance: factory-measured module performance is warranted to meet or exceed the stated panel STC power rating by 0 W to +5 W

⁴y indicates connector type: 34 = Bifurk S418; 38 = Amphenol Helios H4


⁵z indicates manufacturing location: M = Malaysia, X = Mexico, P = China, T = Taiwan

⁶NOCT electrical characteristics measured under normal operating conditions of 800 W/m², 20 C, AM 1.5, wind 1 m/s

For more information about SunEdison's Silvantis modules, please visit www.sunedison.com

©2014 SunEdison Products (Singapore) Pte. Ltd. A SunEdison Company. All rights reserved. SunEdison and the SunEdison logo are registered trademarks or trademarks of SunEdison Products (Singapore) Pte. Ltd. and its affiliates in the United States and certain other countries. All other trademarks mentioned in this document are the property of their respective owners.

R-SERIES SOLAR MODULE DIMENSIONS mm [inch]

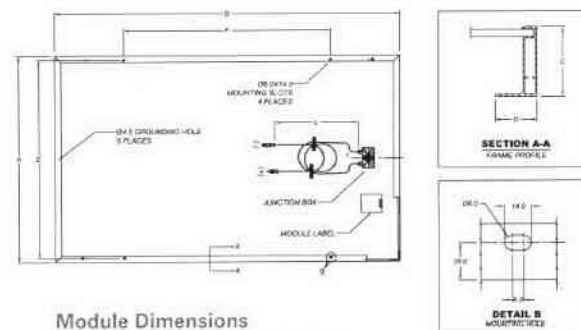

Module Dimensions

A – 990 [39.0] B – 1,658 [65.3]
C – 50 [2.0] D – 30 [1.18]

Mounting Hole Spacing

E – 950 [37.4] F – 994 [39.1]


Cable Length

L – 1,000 [39.4]

Junction Box Dimensions

101.5 x 60.0 x 25.5 [3.99 x 2.36 x 1.0]

IV CURVES AT MULTIPLE IRRADIANCES [25 C]

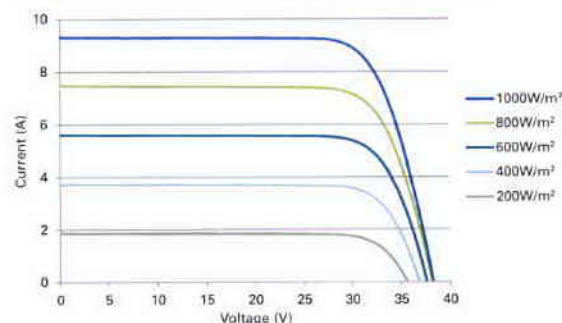

IV CURVES AT MULTIPLE TEMPERATURES [1000 W/m²]

