COLOUR CHART FOR PAREX MINERAL AND LIME RENDERS


Due to printing variations the colours indicated on this colour chart are offered as guidance only and should not be relied upon as a true representation of the actual colour of the finish. Colour will vary depending on the type of finish selected. Application by machine spray or texturing will increase the depth of the colour. Variation in colour due to weather, site conditions and method of application should be expected. For colour verification, request an actual sample in the colour and texture prior to ordering materials. Apply a sample of the finish to be used on the actual substrate before proceeding with the application. Due to the variation in applicator techniques, Parex Ltd is not responsible for the appearance or colour correctness of the applied finish. Colour, texture and finish must be verified and approved by owner prior to application. The colours marked with an * indicate the shades with a solar absorption coefficient over 0.7. These strong shades are more sensitive to colour alteration, efflorescence, time bloom and to climatic constraints.

Ensure that humidity and temperature conditions are taken into account when they are used.

Please note: The shade of the same colour may also differ dependent upon the finishing aspect; e.g. The colour of a Textured finish adjacent to a Smooth finish in the same colour may appear to look different when viewed next to each other.

The colour chart below has been sorted according to colour and reference number:

Some colours are not available for the heritage lime ranges.

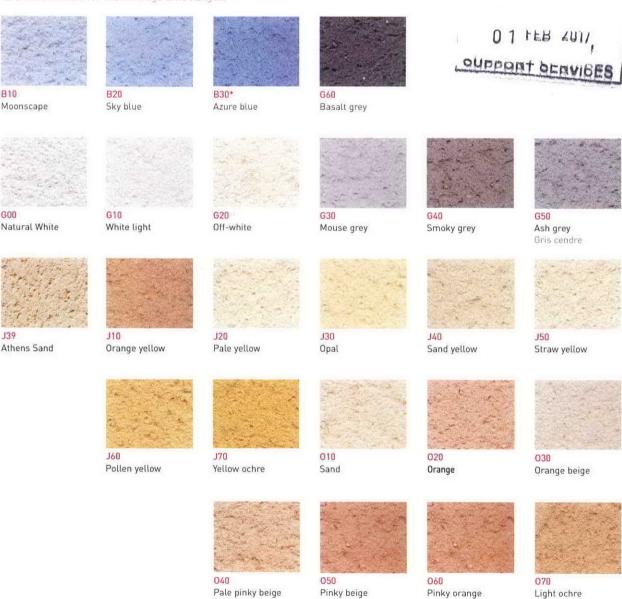



The information provided in this document results from our knowledge of the products and our experience. On-site results may vary, in particular according to the product application methods adopted. Where application methods not covered by this document are used, customers must request specific additional information and/or carry out a representative test before using the products. The above-mentioned information in no way constitutes a warranty relative to the use of the products. Our general terms and conditions of sale shall prevail, in any event, on the information provided in this document. Prior to application, customers and users are requested to check that they have the latest version of this document.

If you have a specific colour you would like to match, contact Parex as we are able to create special colours. (Once a special colour sample has been approved there is a minimum order of one pallet of $40 \times 30 \text{ Kg bags}$)

TEST PANEL

Prior to commencement on site it is recommended that a test panel is produced for inspection by the client, customer, architect etc, so that they may satisfy themselves with the finish, texture, colour rand appearance of the render.

SAMPLES

Parex can provide colour samples for planning applications or for design consideration. These are generally available in a scraped finish. Other finishes can be provided to order.

COLOUR MATCHING OF MINERAL RENDERS

Parex are able to match other mineral render colours but we are unable to match a paint reference colour as the pigmentation process differs between mineral renders and synthetic renders.

Please note: Due to the vulnerability of dark colours to UV light we are unable to create very dark mineral render colours as the amount of colour pigment in mineral renders must not exceed 5% in the finished product. If this percentage is exceeded, the quality of the finished product may be harmed as the co-efficient of solar absorption would be above 0.7 which may cause cracking of the render finish.

